TITE-LOC PLUS PANEL


MATERIALS


.032 aluminum* 24 gauge steel* .040 aluminum* 22 gauge steel*


SPECS

12", 16" or 18" O.C. 2" High

UL-90





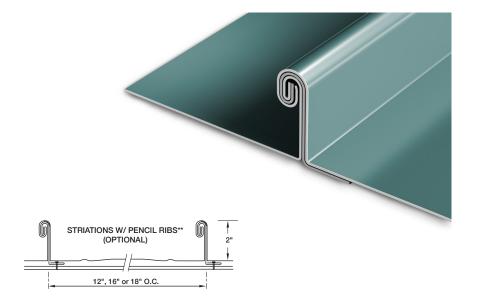

PRODUCT FEATURES

- ▶ Herr-Voss corrective leveled
- Pencil ribs (stiffening beads) and striations are only available by request
- ▶ 30-year non-prorated finish warranty
- Maximum factory-produced panel length is 64' (check w/factory for longer lengths)
- ▶ Weathertightness warranty available

MATERIAL

- ▶ 43 stocked colors (24 gauge steel)
- ▶ 15 stocked colors (22 gauge steel)
- ▶ 36 stocked colors (.032 aluminum)

- 22 stocked colors (.040 aluminum)
- ▶ Galvalume Plus available

UL CLASSIFICATION

- ▶ UL-580 Class 90 rated up to 18" O.C.
- ▶ UL-1897 wind uplift
- ▶ UL-790 Class A fire rated
- ▶ UL-263 fire resistance rated
- ▶ UL-2218 impact resistance rated

TESTS (TITE-LOC PLUS ONLY)

24 Gauge steel SSTD Missile Impact Tested - Passed .032 aluminum SSTD Missile Impact Tested - Passed

ASTM TESTS

- ASTM E1592 tested
- ▶ ASTM E331/1646 tested
- ASTM E283/1680 tested
- ► ASTM E2140 (Tite-Loc Plus only)

FLORIDA BUILDING & MIAMI-DADE PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for Tite-Loc Plus.

Not all panel conditions are available in each Petersen branch; additional freight charges might apply if specific panel condition is required. Tite-Loc and Tite-Loc Plus panels are supplied with striations as standard. Customer must advise if additional panel conditions are required.



^{*24} gauge and 22 gauge steel and .032 and .040 aluminum panels are UL-90 classified over solid substrate. See roof deck construction in Underwriters Laboratories roofing materials and systems directory. 24 gauge and 22 gauge Tite-Loc Plus panels are FM Approved in 12" and 16" widths over 16 gauge open purlins only.

^{**} Not available in all locations. Consult PAC rep for availability.